

DX 225LC

CRAWLER EXCAVATOR

DOOSAN®

na.DoosanEquipment.com/dx225lc-7



TECHNICAL SPECIFICATIONS

ENGINE

MAKE	Doosan
MODEL	DL06P
NUMBER OF CYLINDERS	6
RATED POWER GROSS (HP PER SAE J1995)	174 hp (129 kW) @ 1800 rpm
RATED POWER NET (HP PER SAE J1349)	162 hp (121 kW) @ 1800 rpm
MAX. TORQUE (GROSS) (SAE J1995)	593 ft.-lb. (804 Nm) @ 1400 rpm
PISTON DISPLACEMENT	359 in. ³ (5.9 L)
BORE AND STROKE	3.9 in. x 4.9 in. (100 mm x 125 mm)
STARTER	24 V, 8.6 hp (6.0 kW)
BATTERY	2 x 12 V, 100 AH
ALTERNATOR	24 V, 100 A
AIR CLEANER	Three-Stage

HYDRAULICS

MAIN PUMPS	2 x 56 gpm (2 x 212 L/min)
PILOT PUMP (GEAR DESIGN)	8 gpm (30 L/min)

WORKING PRESSURE

BOOM/ARM/BUCKET (NORMAL MODE)	4978 psi (350 kg/cm ²)
BOOM/ARM/BUCKET (POWER BOOST)	5263 psi (370 kg/cm ²)
TRAVEL	5263 psi (370 kg/cm ²)
SWING	3840 psi (270 kg/cm ²)
PILOT	566 psi (40 kg/cm ²)

UNDERCARRIAGE

UPPER ROLLERS (EACH TRACK)	2
LOWER ROLLERS (EACH TRACK)	8
NUMBER OF SHOES (LINKS PER SIDE)	49

SWING MECHANISM

SWING SPEED	0 – 11 rpm
SWING TORQUE	60,757 lbf.-ft. (8400 kgf-m)

DRIVE SYSTEM

TRAVEL SPEED [LOW – HIGH]	1.9 – 3.4 mph (3.0 – 5.5 km/h)
TRACTION FORCE, MAX. (DRAWBAR PULL)	199,197 lbf.-ft. (27,540 kgf-m)
MAX. GRADE (LIMITED BY ENGINE LUB)	70% (35°)



ENVIRONMENT

SOUND LEVEL (2000/14/EC)	102 dB(A)
CABIN SOUND LEVEL (ISO 6396)	70 dB(A)

REFILL CAPACITIES

FUEL TANK	104 gal. (392 L)
DEF TANK	8.3 gal. (31.5 L)
COOLING SYSTEM (RADIATOR CAPACITY)	7.8 gal. (29.7 L)
ENGINE OIL (WITH FILLER)	7.1 gal. (27 L)
SWING DRIVE	1.3 gal. (5 L)
FINAL DRIVE (EACH SIDE)	1.1 gal. (4 L)
HYDRAULIC SYSTEM	61 gal. (230 L)
HYDRAULIC TANK	35 gal. (131 L)

HYDRAULIC CYLINDERS

BOOM ¹ (2) BORE x ROD DIAMETER x STROKE	4.9 in. x 3.4 in. x 49.7 in. (125 mm x 85 mm x 1263 mm)
ARM ^{1,2} (1) BORE x ROD DIAMETER x STROKE	5.3 in. x 3.9 in. x 56.8 in. (135 mm x 100 mm x 1443 mm)
BUCKET (STD) ¹ (1) BORE x ROD DIAMETER x STROKE	4.7 in. x 3.1 in. x 41.7 in. (120 mm x 80 mm x 1060 mm)

1 Cushion on Rod End
2 Cushion on Base End

The piston rods and cylinder bodies are made of high-strength steel. A shock-absorbing mechanism is fitted in all cylinders to ensure shock-free operation and extended piston life.

NOTE: Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. All dimensions are given for Doosan excavators equipped with standard tracks and the standard front as listed. Pictures of Doosan excavators may show other than standard equipment. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Doosan equipment is manufactured with a Quality Management System that is in compliance with ISO 9001:2008.


DX 225LC



DIMENSIONS

		STANDARD ARM 31.5" (800 MM) TG SHOE (US20)	LONG ARM 35.4" (900 MM) TG SHOE (US30)	STANDARD ARM & DOZER BLADE 31.5" (800 MM) TG SHOE (US40)	SUPER-LONG REACH 35.4" (900 MM) TG SHOE (US50)
BOOM LENGTH		18' 8" (5700 mm)			27' 11" (8500 mm)
ARM LENGTH		9' 6" (2900 mm)	11' 6" (3500 mm)	9' 6" (2900 mm)	20' 4" (6200 mm)
BUCKET TYPE (SAE)		1.2 yd ³ (0.92 m ³)	1.06 yd ³ (0.81 m ³)	1.2 yd ³ (0.92 m ³)	0.51 yd ³ (0.39 m ³)
TRACK TYPE		FIXED			
TAIL SWING RADIUS	A ₁	9' 7" (2909 mm)			
TAIL SWING OVERHANG (REAR)	A ₂	2' 3" (686 mm)			
TAIL SWING OVERHANG (SIDE)	A ₃	4' 8" (1414 mm)	4' 4" (1314 mm)	4' 8" (1414 mm)	4' 4" (1314 mm)
SHIPPING HEIGHT (BOOM)	B	9' 6" (2890 mm)	10' 2" (3110 mm)	9' 6" (2890 mm)	10' 10" (3295 mm)
SHIPPING HEIGHT (HOSE)	C	9' 10" (3005 mm)	10' 10" (3305 mm)	9' 10" (3005 mm)	11' 1" (3385 mm)
SHIPPING LENGTH	D	31' 5" (9570 mm)	31' 6" (9610 mm)	31' 5" (9570 mm)	40' 8" (12,390 mm)
SHIPPING WIDTH	E	10' 6" (3190 mm)	10' 9" (3290 mm)	10' 6" (3190 mm)	10' 9" (3290 mm)
COUNTERWEIGHT CLEARANCE	F	3' 7" (1092 mm)			
CABIN HEIGHT	G	9' 9" (2980 mm)			
UPPER STRUCTURE WIDTH	H	8' 11" (2710 mm)			
CABIN HEIGHT ABOVE HOUSE	I	2' 9" (840 mm)			
CABIN WIDTH	J	3' 4" (1010 mm)			
TUMBLER DISTANCE	K	12' 0" (3650 mm)			
OVERALL TRACK LENGTH	L	14' 7" (4445 mm)			
UNDERCARRIAGE WIDTH	M	10' 6" (3190 mm)	10' 9" (3290 mm)	10' 6" (3190 mm)	10' 9" (3290 mm)
TRACK GAUGE WIDTH	N	7' 10" (2390 mm)			
TRACK SHOE WIDTH	O	31.5" (800 mm)	35.4" (900 mm)	31.5" (800 mm)	35.4" (900 mm)
TRACK HEIGHT	P	3' 1" (945 mm)			
CAR BODY CLEARANCE	Q	1' 6" (450 mm)			

*Without shoe grouser

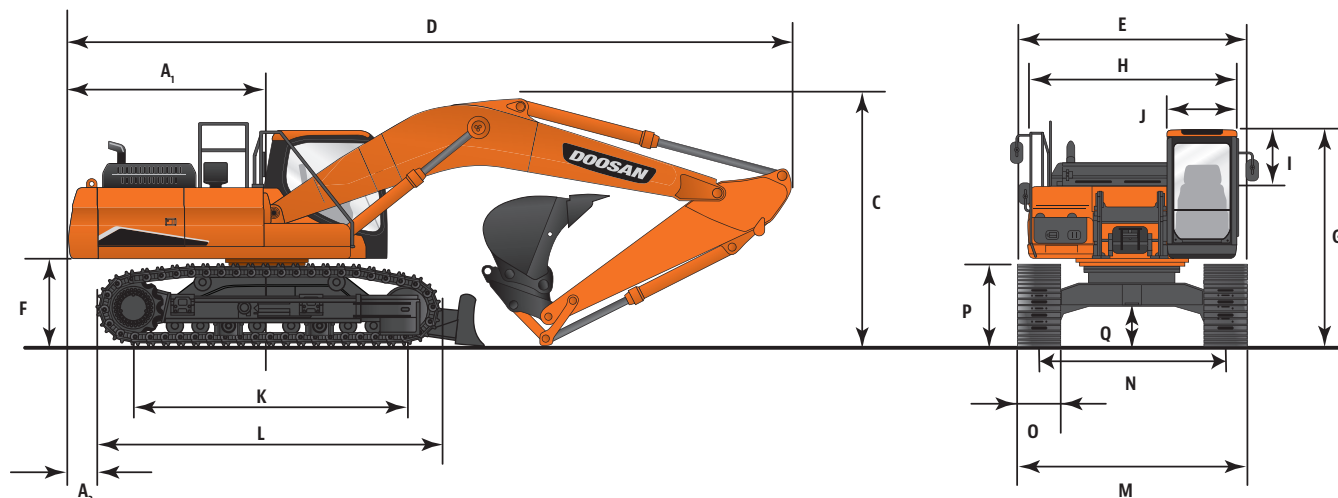


DX 225LC



WORKING RANGE

		STANDARD ARM 31.5" (800 MM) TG SHOE (US20)	LONG ARM 35.4" (900 MM) TG SHOE (US30)	STANDARD ARM & DOZER BLADE 31.5" (800 MM) TG SHOE (US40)	SUPER-LONG REACH 35.4" (900 MM) TG SHOE (US50)
BOOM LENGTH		18' 8" (5700 mm)			27' 11" (8500 mm)
ARM LENGTH		9' 6" (2900 mm)	11' 6" (3500 mm)	9' 6" (2900 mm)	20' 4" (6200 mm)
BUCKET TYPE (SAE) PCSA		1.2 yd³ (0.92 m³)	1.06 yd³ (0.81 m³)	1.2 yd³ (0.92 m³)	0.51 yd³ (0.39 m³)
TRACK TYPE		FIXED			
MAX. DIGGING REACH	A	32' 3" (9865 mm)	34' 0" (10385 mm)	32' 3" (9865 mm)	50' 5" (15,365 mm)
MAX. DIGGING REACH (GROUND)	B	31' 10" (9695 mm)	33' 6" (10220 mm)	31' 10" (9695 mm)	50' 1" (15,255 mm)
MAX. DIGGING DEPTH	C	21' 7" (6590 mm)	23' 6" (7210 mm)	21' 7" (6590 mm)	38' 3" (11,660 mm)
MAX. LOADING HEIGHT	D	22' 5" (6830 mm)	22' 11" (6960 mm)	22' 5" (6830 mm)	35' 6" (10,830 mm)
MIN. LOADING HEIGHT	E	8' 2" (2500 mm)	6' 2" (1870 mm)	8' 2" (2500 mm)	6' 7" (2,015 mm)
MAX. DIGGING HEIGHT	F	31' 7" (9620 mm)	31' 8" (9635 mm)	31' 7" (9620 mm)	42' 10" (13,045 mm)
MAX. BUCKET PIN HEIGHT	G	27' 2" (8270 mm)	27' 8" (8415 mm)	27' 2" (8270 mm)	39' 6" (12,050 mm)
MAX. VERTICAL WALL DEPTH	H	18' 2" (5525 mm)	19' 7" (5995 mm)	18' 2" (5525 mm)	31' 10" (9715 mm)
MAX. RADIUS VERTICAL	I	21' 1" (6415 mm)	22' 1" (6740 mm)	21' 1" (6415 mm)	33' (10,060 mm)
MAX. DEPTH TO 8' LINE	J	21' 0" (6395 mm)	22' 11" (7030 mm)	21' 0" (6395 mm)	37' 11" (11,555 mm)
MIN. RADIUS 8' LINE	K	9' 3" (2820 mm)	9' 1" (2790 mm)	9' 3" (2820 mm)	15' 10" (4,815 mm)
MIN. DIGGING REACH	L	1' 11" (575 mm)	-8" (-225 mm)	1' 11" (575 mm)	6" (150 mm)
MIN. SWING RADIUS	M	11' 8" (3560 mm)	11' 10" (3615 mm)	11' 8" (3560 mm)	16' 4" (4,970 mm)
BUCKET ANGLE (DEG)	d	177°			
DIGGING FORCE, BUCKET (PCSA)	ISO	36,376 lbf. (16,500 kgf)			23,840 lbf. (10,814 kgf)
DIGGING FORCE, ARM		25,3530 lbf. (11,500 kgf)	22,708 lbf. (10,300 kgf)	25,353 lbf. (11,500 kgf)	13,999 lbf. (6,350 kgf)
OPERATING WEIGHT		52,086 lb. (23,626 kg)	52,768 lb. (23,935 kg)	55,614 lb. (25,226 kg)	55,731 lb. (25,279 kg)
GROUND PRESSURE		5.3 psi (0.37 kg/cm²)	4.8 psi (0.34 kg/cm²)	5.7 psi (0.40 kg/cm²)	5.1 psi (0.36 kg/cm²)

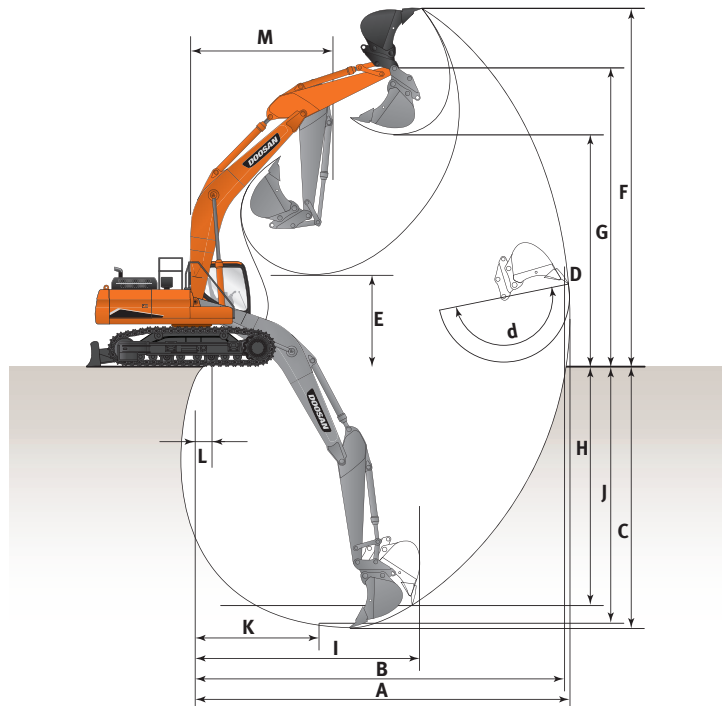



STANDARD ARM (US20)			LONG ARM (US30)		STANDARD ARM & DOZER BLADE (US40)		SUPER-LONG ARM (US50)
BOOM	18' 8" (5700 mm)						27' 11" (8500 mm)
ARM	9' 6" (2900 mm)		11' 6" (3500 mm)		9' 6" (2900 mm)		20' 4" (6200 mm)
SHOE SIZE	31.5" (800 mm)		35.4" (900 mm)		31.5" (800 mm)		35.4" (900 mm)
TRACK TYPE	FIXED		FIXED		FIXED WITH DOZER		FIXED
MOUNT	PIN-ON	QUICK-COUPLER	PIN-ON	QUICK-COUPLER	PIN-ON	QUICK-COUPLER	PIN-ON
COUNTERWEIGHT	10,780 lb. (4900 kg)		11,660 lb. (5300 kg)		10,780 lb. (4900 kg)		11,660 lb. (5300 kg)

BUCKET TYPE	MODEL	CAPACITY ¹ YD ³ (M ³)	WIDTH IN. (MM)	WEIGHT LB. (KG)							
HEAVY-DUTY	HD22-024	0.55 (0.42)	24 (610)	1394 (632)	A	A	A	A	A	A	X
	HD22-030	0.74 (0.57)	30 (762)	1566 (710)	A	A	A	A	A	A	X
	HD22-036	0.94 (0.72)	36 (914)	1747 (792)	A	A	A	A	A	A	X
	HD22-042	1.14 (0.87)	42 (1067)	1893 (858)	A	A	A	A	A	A	X
	HD22-048	1.34 (1.02)	48 (1219)	2074 (940)	A	B	A	B	A	B	X
SEVERE-DUTY	SD22-024	0.55 (0.42)	24 (610)	1424 (645)	A	A	A	A	A	A	X
	SD22-030	0.74 (0.57)	30 (762)	1586 (719)	A	A	A	A	A	A	X
	SD22-036	0.94 (0.72)	36 (914)	1774 (804)	A	A	A	A	A	A	X
	SD22-042	1.14 (0.87)	42 (1067)	1919 (870)	A	A	A	A	A	A	X
	SD22-048	1.34 (1.02)	48 (1219)	2097 (951)	A	B	A	B	A	A	X
DITCHING	DC140-048	0.63 (0.48)	48 (1219)	820 (372)	A	A	A	A	A	A	C
	DC140-060	0.80 (0.61)	60 (1524)	985 (447)	A	A	A	A	A	A	C
	HDC140-060	1.38 (1.06)	60 (1524)	1620 (735)	A	A	A	B	A	A	C
	DC200-048	0.97 (0.74)	48 (1219)	1195 (542)	A	A	A	A	A	A	X
	DC200-060	1.22 (0.93)	60 (1524)	1395 (632)	A	A	A	A	A	A	X
	DC200-072	1.34 (1.02)	72 (1829)	1565 (709)	A	A	A	B	A	A	X
	HDC200-060	1.96 (1.50)	60 (1524)	2370 (1075)	C	C	C	C	C	C	X
	HDC200-066	2.16 (1.65)	66 (1676)	2554 (1158)	C	X	C	X	C	C	X

1 Capacity based on ISO 7451 and heaped with a 1:1 angle of repose

2 Equipped with Bolt On Wear Shrouds

3 Equipped with Bolt On Teeth

4 Equipped with Bolt On Cutting Edge

5 These recommendations are given as a guide only and based on typical operation conditions

Maximum Suitable Material Density

A 3,370 lb./yd³ (2000 kg/m³)

B 2,700 lb./yd³ (1600 kg/m³)

C 1,850 lb./yd³ (1100 kg/m³)

X Not Approved

Please consult with your Doosan® dealer to properly match buckets and attachments for the application

DX 225LC

LIFTING CAPACITY

 Rating over front
 Rating over side or 360°


DX225LC-7 US20 BOOM: 18' 8" (5700 MM) ARM: 9' 6" (2900 MM) COUNTERWEIGHT: 10,800 LB. (4900 KG) 31.5" (800 MM) TG SHOES NO DOZER BUCKET: NONE UNIT: LB. (KG)													
A (ft. or m)	5' (1.5 m)		10' (3.0 m)		15' (4.5 m)		20' (6.0 m)		25' (7.5 m)		MAX. REACH		
												A	
25' (7.5 m)							* 11,530 (* 5,241)	* 11,530 (* 5,241)			* 10,050 (* 4,568)	* 10,050 (* 4,568)	20.34' (6.20 m)
20' (6.0 m)							* 12,750 (* 5,795)	* 12,750 (* 5,795)			* 9,370 (* 4,259)	* 9,370 (* 4,259)	23.98' (7.31 m)
15' (4.5 m)							* 13,980 (* 6,355)	13,130 (5,968)	* 12,940 (* 5,882)	9,300 (4,227)	* 9,240 (* 4,200)	8,390 (3,814)	26.21' (7.99 m)
10' (3.0 m)					* 20,420 (* 9,282)	19,100 (8,682)	* 15,910 (* 7,232)	12,570 (5,714)	* 13,730 (* 6,241)	9,060 (4,118)	* 9,480 (* 4,309)	7,690 (3,495)	27.38' (8.35 m)
5' (1.5 m)					* 24,230 (* 11,014)	17,940 (8,155)	* 17,840 (* 8,109)	12,010 (5,459)	13,440 (6,109)	8,800 (4,000)	* 10,110 (* 4,595)	7,450 (3,386)	27.63' (8.42 m)
Ground Level			* 14,080 (* 6,400)	* 14,080 (* 6,400)	* 26,060 (* 11,845)	17,310 (7,868)	18,300 (8,318)	11,620 (5,282)	13,220 (6,009)	8,590 (3,905)	* 11,250 (* 5,114)	7,600 (3,455)	26.98' (8.22 m)
-5' (-1.5 m)	* 15,370 (* 6,986)	* 15,370 (* 6,986)	* 24,440 (* 11,109)	* 24,440 (* 11,109)	* 25,830 (* 11,741)	17,140 (7,791)	18,120 (8,236)	11,460 (5,209)	13,160 (5,982)	8,540 (3,882)	12,640 (5,745)	8,220 (3,736)	25.36' (7.73 m)
-10' (-3.0 m)	* 26,340 (* 11,973)	* 26,340 (* 11,973)	* 32,850 (* 14,932)	* 32,850 (* 14,932)	* 23,620 (* 9,910)	17,280 (7,855)	* 17,570 (* 7,986)	11,550 (5,250)			* 14,430 (* 6,559)	9,700 (4,409)	22.57' (6.88 m)
-15' (-4.5 m)			* 25,100 (* 11,409)	* 25,100 (* 11,409)	* 18,340 (* 8,260)	* 18,340 (* 8,260)					* 14,050 (* 6,386)	* 14,050 (* 6,386)	18.05' (5.50 m)

DX225LC-7 US30 BOOM: 18' 8" (5700 MM) ARM: 11' 6" (3500 MM) COUNTERWEIGHT: 11,685 LB. (5300 KG) 35.4" (900 MM) TG SHOES NO DOZER BUCKET: NONE UNIT: LB. (KG)													
A (ft. or m)	5' (1.5 m)		10' (3.0 m)		15' (4.5 m)		20' (6.0 m)		25' (7.5 m)		MAX. REACH		
													A
25' (7.5 m)											* 7,820 (* 3,555)	* 7,820 (* 3,555)	22.79' (6.95 m)
20' (6.0 m)									* 10,110 (* 4,595)	9,980 (4,536)	* 7,960 (* 3,618)	* 7,960 (* 3,618)	25.87' (7.89 m)
15' (4.5 m)							* 12,500 (* 5,682)	* 12,500 (* 5,682)	* 11,730 (* 5,332)	9,810 (4,459)	* 7,890 (* 3,586)	* 7,890 (* 3,586)	27.95' (8.52 m)
10' (3.0 m)			* 27,420 (* 12,464)	* 27,420 (* 12,464)	* 18,170 (* 8,259)	* 18,170 (* 8,259)	* 14,540 (* 6,609)	13,260 (6,027)	* 12,700 (* 5,773)	9,510 (4,323)	* 8,120 (* 3,691)	7,340 (3,336)	29.04' (8.85 m)
5' (1.5 m)					* 22,430 (* 10,195)	18,960 (8,618)	* 16,690 (* 7,586)	12,600 (5,727)	* 13,800 (* 6,273)	9,170 (4,168)	* 8,650 (* 3,932)	7,100 (3,550)	29.28' (8.92 m)
Ground Level			* 17,130 (* 7,786)	* 17,130 (* 7,786)	* 25,060 (* 11,391)	18,070 (8,214)	* 18,290 (* 8,314)	12,090 (5,495)	13,690 (6,223)	8,900 (4,045)	* 9,580 (* 4,355)	7,200 (3,600)	28.67' (8.74 m)
-5' (-1.5 m)	* 15,100 (* 6,864)	* 15,100 (* 6,864)	* 24,070 (* 10,941)	* 24,070 (* 10,941)	* 25,670 (* 11,668)	17,710 (8,050)	18,710 (8,505)	11,830 (5,915)	13,530 (6,150)	8,750 (3,977)	* 11,200 (* 5,091)	7,700 (3,500)	27.16' (8.28 m)
-10' (-3.0 m)	* 23,480 (* 10,673)	* 23,480 (* 10,673)	* 34,720 (* 15,782)	* 34,720 (13,530)	* 24,350 (* 11,068)	17,740 (8,064)	* 18,080 (* 8,218)	11,810 (5,368)			* 13,530 (* 6,150)	8,850 (4,023)	24.57' (7.49 m)
-15' (-4.5 m)	* 34,430 (* 15,650)	* 34,430 (* 15,650)	* 28,830 (* 13,105)	* 28,830 (* 13,105)	* 20,580 (* 9,355)	18,120 (8,236)	* 14,750 (* 6,705)	12,130 (5,514)			* 13,750 (* 6,250)	11,520 (5,236)	20.5' (6.25 m)

DX225LC-7 US40 BOOM: 18' 8" (5700 MM) ARM: 9' 6" (2900 MM) COUNTERWEIGHT: 10,800 LB. (4900 KG) 31.5" (800 MM) TG SHOES DOZER UP BUCKET: NONE UNIT: LB. (KG)													
A (ft. or m)	5' (1.5 m)		10' (3.0 m)		15' (4.5 m)		20' (6.0 m)		25' (7.5 m)		MAX. REACH		
													A
25' (7.5 m)							* 11,530 (* 5,241)	* 11,530 (* 5,241)			* 10,050 (* 4,568)	* 10,050 (* 4,568)	20.34' (6.20 m)
20' (6.0 m)							* 12,750 (* 5,795)	* 12,750 (* 5,795)			* 9,370 (* 4,259)	* 9,370 (* 4,259)	23.98' (7.31 m)
15' (4.5 m)							* 13,980 (* 6,355)	13,880 (6,309)	* 12,940 (* 5,882)	9,870 (4,486)	* 9,240 (* 4,200)	8,910 (4,050)	26.21' (7.99 m)
10' (3.0 m)					* 20,420 (* 9,282)	20,200 (9,182)	* 14,660 (* 6,664)	13,320 (6,055)	* 13,730 (* 6,241)	9,630 (4,377)	* 9,480 (* 4,309)	8,190 (3,723)	27.38' (8.35 m)
5' (1.5 m)					* 24,230 (* 11,014)	19,030 (8,650)	* 16,390 (* 7,450)	12,760 (5,800)	* 14,640 (* 6,655)	9,360 (4,255)	* 10,110 (* 4,595)	7,940 (3,609)	27.63' (8.42 m)
Ground Level			* 14,080 (* 6,400)	* 14,080 (* 6,400)	* 26,060 (* 11,845)	18,400 (8,364)	16,130 (7,332)	12,370 (5,623)	14,800 (6,227)	9,160 (4,164)	* 11,250 (* 5,114)	8,100 (3,682)	26.98' (8.22 m)
-5' (-1.5 m)	* 15,370 (* 6,986)	* 15,270 (* 6,941)	* 24,400 (* 11,091)	* 24,400 (* 11,091)	* 25,830 (* 11,741)	18,230 (8,286)	15,970 (7,259)	12,210 (5,550)	14,740 (6,700)	9,110 (4,141)	* 13,300 (* 6,045)	8,770 (3,986)	25.36' (7.73 m)
-10' (-3.0 m)	* 26,340 (* 11,973)	* 25,940 (* 11,791)	* 32,850 (* 14,932)	* 32,850 (* 14,932)	* 23,620 (* 10,736)	18,380 (8,354)	* 15,810 (* 7,186)	12,290 (5,586)			* 14,430 (* 6,559)	10,330 (4,695)	22.57' (6.88 m)
-15' (-4.5 m)			* 25,100 (* 11,409)	* 25,100 (* 11,409)	* 18,340 (* 8,336)	17,790 (8,086)					* 14,050 (* 6,386)	* 14,050 (* 6,386)	18.05' (5.50 m)

A Distance from center of rotation
 B Height

NOTE: Lift Capacities are in compliance with SAE 1097 and ISO 10567. Machine in Lifting Mode with Power Boost turned on. Load point is the end of the arm. Rated loads shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities. Rated loads marked with an asterisk (*) are limited by hydraulic capacities. The least stable position is over the side. The total mass of machine includes the mass of the boom, arm, counterweight, all operating fluids and 165 lb (75 kg) operator.

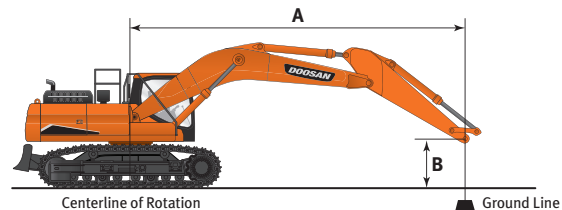




LIFTING CAPACITY

Rating over front
 Rating over side or 360°

DX225LC-7 US50 BOOM: 27' 11" (8500 MM) ARM: 20' 4" (6,200 MM) COUNTERWEIGHT: 11,684 LB. (5,300 KG) 900MM TG SHOES BUCKET: NONE UNIT: LB (KG)												
A (ft. or m)	5' (1.5 m)	10' (3.0 m)	15' (4.5 m)	20' (6.0 m)	25' (7.5 m)	30' (9.0 m)	35' (10.5 m)	40' (12.0 m)	45' (13.5 m)	MAX. REACH		
B (ft. or m)												A
40'												
(12.0 m)												
35'												
(10.5 m)												
30'												
(9.0 m)												
25'												
(7.5 m)												
20'												
(6.0 m)												
15'												
(4.5 m)												
10'												
(3.0 m)												
5'												
(1.5 m)												
Ground Level												
-5'												
(-1.5 m)												
-10'												
(-3.0 m)												
-15'												
(-4.5 m)												
-20'												
(-6.0 m)												
-25'												
(-7.5 m)												
-30'												

A Distance from center of rotation
B Height

NOTE: Lift Capacities are in compliance with SAE 1097 and ISO 10567. Machine in Lifting Mode with Power Boost turned on. Load point is the end of the arm. Rated loads shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities. Rated loads marked with an asterisk (*) are limited by hydraulic capacities. The least stable position is over the side. The total mass of machine includes the mass of the boom, arm, counterweight, all operating fluids and 165 lb (75 kg) operator.

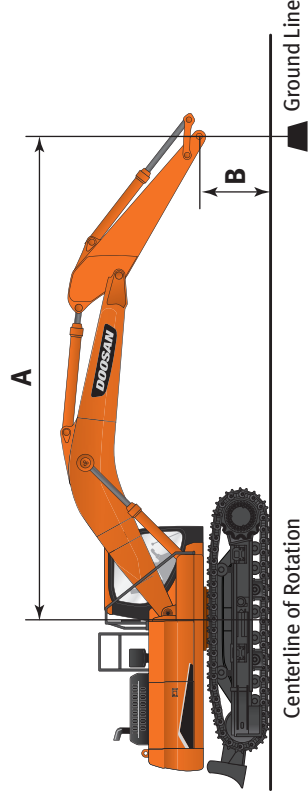



STANDARD & OPTIONAL EQUIPMENT

● Standard Equipment
■ Optional Equipment

ENGINE

EMISSIONS (EPA)	T4f
HIGH-PRESSURE COMMON-RAIL (HPCR)	●
TURBO, WASTE GATE (WGT)	●
COOLED EXHAUST GAS RECIRCULATION (CEGR)	●
DIESEL OXIDATION CATALYST (DOC)	●
SELECTIVE CATALYST REDUCTION (SCR)	●
DIESEL EXHAUST FLUID (DEF)	●
FUEL FILTER WITH WATER SEPARATOR	●
COOLANT EXPANSION TANK	●
DUAL ELEMENT DRY-TYPE AIR FILTER WITH EVACUATOR	●
PRE-CLEANER	●
ELECTRONIC ENGINE CONTROL (ECU)	●
AUTO IDLE	●
AUTO SHUTDOWN (TIME-ADJUSTABLE)	●
OVERHEAT & LOW OIL PRESSURE ENGINE PROTECTION	●
BLOCK HEATER (110V)	■
WATER SEPARATOR WITH HEATER	■
FUEL FILLER PUMP	■

HYDRAULIC

ELECTRONIC POWER OPTIMIZING SYSTEM (EPOS)	●
VARIABLE AXIAL PISTON MAIN PUMP (TANDEM)	●
CROSS-SENSING PUMP CONTROL	●
PILOT-OPERATED CONTROL VALVES	●
GEAR PILOT PUMP	●
SMART POWER CONTROL (SPC)	●
VARIABLE-SPEED HYDRAULIC COOLING FAN	●
AXIAL PISTON SWING MOTOR	●
SPRING-APPLIED HYDRAULIC RELEASE BRAKE, SWING MOTOR	●
AXIAL PISTON TRAVEL MOTOR (HIGH/LOW, AUTO)	●
AUXILIARY HYDRAULICS, ONE- & TWO-WAY PIPING	●
AUXILIARY HYDRAULICS, TILT/ROTATE PIPING	■
ADJUSTABLE AUXILIARY FLOW & PRESSURE, TO PRESETS	●
INTELLIGENT FLOATING BOOM	■
BREAKER FILTER	■
BOOM & ARM LOCK VALVES	■
CLAMSHELL PIPING	■
STRAIGHT TRAVEL	■

CABIN

STEEL, ALL-WEATHER & SOUND-SUPPRESSED	●
ROPS (ISO 12117-2:2008)	●
VISCOUS MOUNT WITH SPRING REINFORCEMENT	●
FRONT WINDOW WITH WIPER/WASHER	●
TINTED SAFETY GLASS	●

CABIN (CONTINUED)

SKYLIGHT TOP HATCH WITH SUN SCREEN	●
FRONT WINDOW WITH SUN SCREEN	●
PULL-UP TYPE TOP FRONT WINDOW	●
REMOVABLE LOWER FRONT WINDOW WITH STORAGE BEHIND SEAT	●
ADJUSTABLE SLIDING SIDE DOOR WINDOW	●
DEFROST, FRONT WINDOW	●
LOCKABLE DOORS	●
SEAT - HEATED - AIR SUSPENSION - 2" (51 MM) SEAT BELT - ADJUSTABLE HEIGHT & RECLINE - ADJUSTABLE FORE/AFT - ADJUSTABLE ARM RESTS	●
LEATHERITTE SEAT - HEATING & COOLING - AIR SUSPENSION - 2" (51 MM) SEAT BELT - ADJUSTABLE HEIGHT & RECLINE - ADJUSTABLE FORE/AFT - ADJUSTABLE ARM RESTS	■
3" (76 MM) SEAT BELT	■
CONTROL STANDS - HEIGHT ADJUSTABLE - MOUNTED TO SEAT BASE	●
STORAGE FOR OPERATOR'S MANUALS	●
MIRRORS	●
FULLY AUTOMATIC HVAC WITH AMBIENT TEMPERATURE SENSOR	●
8" MULTI-FUNCTION LCD INTERACTIVE DISPLAY MONITOR	●
CIGARETTE LIGHTER	●
DIGITAL AUDIO BROADCASTING STEREO	●
SPEAKERS (2)	●
ANTENNA, ROOF-MOUNTED	●
EMERGENCY BREAKOUT TOOL	●
HOT/COLD BEVERAGE COMPARTMENT	●
POWER SOCKET, 12 V & 24 V	●
CUP HOLDER	●
INTERIOR LIGHT	●
COAT HANGER	●
RAIN SHIELD	■
FOG GUARD	■
FRONT WINDOW GUARD	■

ELECTRICAL

SYSTEM VOLTAGE – 24 V	●
ALTERNATOR – 24 V, 80 AMP	●
ALTERNATOR – 24 V, 100 AMP	●
2 X 12 V BATTERIES, 150 AH RESERVE CAPACITY, 950 CCA	●
BLADE-TYPE FUSE PANEL	●
MAIN CIRCUIT BREAKER	●
LIGHT, WORK (LED): MACHINE (2), BOOM (2)	●
LIGHT, WORK (LED): 6 CAB TOP, FRONT (4), REAR (2)	■

ELECTRICAL (CONTINUED)

LIGHT, WORK (LED): 4 CAB TOP, FRONT (2), REAR (2)	■
ROTATING BEACON	■
OVERLOAD WARNING ALARM	■
HOURLY METER	●
ENGINE RESTART PREVENTION SYSTEM	●
SIDE VIEW & REARVIEW CAMERA WITH LED LAMPS (3)	●
ALL-AROUND VIEW CAMERA 360°	■
MICROPHONE & SPEAKER	●
ULTRASONIC SENSOR	■
LAPTOP SERVICE PORT	●
SELF-DIAGNOSTICS SYSTEM	●
SMART KEY (REMOTE IGNITION KEY)	●
DOOSANCONNECT® TELEMATICS	●

DISPLAY MONITOR & WARNINGS

INDICATORS - WORK MODES (P+, P, S, E) - USER/SERVICE MENU	●
GAUGES - FUEL LEVEL - DEF LEVEL - ENGINE COOLANT TEMPERATURE - HYDRAULIC OIL TEMPERATURE - ENGINE RPM - BATTERY VOLTAGE - HYDRAULIC PUMP PRESSURE - ECO - DIGITAL CLOCK - TRIP METER - HOUR METER - FUEL CONSUMPTION	●
WARNING & INDICATOR LIGHTS - SEAT BELT - ERROR CODE - SCR WARNING - CHECK ENGINE - ENGINE OIL PRESSURE - ENGINE PRE-HEAT ENGAGED - RADIATOR COOLANT LEVEL & TEMPERATURE - AIR FILTER - FUEL LEVEL - DEF LEVEL – LOW - WATER IN FUEL - BATTERY CHARGE - WORK LIGHTS ON - HYDRAULIC OIL TEMPERATURE - HYDRAULIC CHARGE PRESSURE - HYDRAULIC PILOT FILTER - HYDRAULIC RETURN FILTER	●
SWING ALARM	●
TRAVEL ALARM	●
BUZZER - ENGINE OIL PRESSURE - COOLANT TEMPERATURE	●

UNDERCARRIAGE

TRACK GUARDS & CHAINS WITH ADJUSTERS	●
TRACK ROLLERS, UPPER	2
TRACK ROLLERS, LOWER	8
IN-SHOE MOTOR PROTECTION	●
SHOES, TRIPLE GROUSER – 700 MM	■
SHOES, TRIPLE GROUSER – 800 MM	●
SHOES, TRIPLE GROUSER – 900 MM	■
DOZER BLADE, FRONT	■

CONTROLS

JOYSTICK CONTROLS	●
PATTERN CONTROL CHANGE VALVE (SAE, ISO)	●
JOYSTICK ATTACHMENT CONTROL SWITCHES/BUTTONS - RIGHT (ONE-WAY, TWO-WAY, POWER BOOST) - LEFT (TILT/ROTATE, HORN, ONE-TOUCH DECEL)	●
FOOT PEDAL ATTACHMENT CONTROL	●
CONTROL STANDS - HEIGHT ADJUSTABLE - SLIDING (FORE/AFT) - TILTING ARM RESTS	●
ENGINE SPEED CONTROL DIAL	●
TRAVEL PEDALS WITH HAND LEVERS	●
STRAIGHT TRAVEL PEDAL	■
SWITCHES, CONSOLE-MOUNTED - STARTER BUTTON SWITCH - TRAVEL SPEED SELECTOR - WORK LIGHT - AUXILIARY MODE SWITCH	●
EMERGENCY STOP SWITCH	●
POWER MODES (P+, P, S, E)	●
WORK MODES (DIGGING, LIFTING, BREAKER, SHEAR)	●
SMART POWER CONTROL (SPC)	●
JOG DIAL DISPLAY CONTROL	●
WIPER CONTROL PANEL	●
AUDIO CONTROL PANEL	●

OTHER

CENTRALIZED LUBRICATION - BOOM - SWING	●
HANDRAILS & SERVICE PLATFORMS	●
SKID-RESISTANT STEPS & SERVICE PLATFORMS	●
MANUALS - OPERATION & MAINTENANCE - PARTS - AEM SAFETY MANUAL	●
DOOSANCONNECT® 3-YEAR SUBSCRIPTION (TELEMATICS)	●
VANDALISM PROTECTION - LOCKABLE PANELS - LOCKABLE FLUID FILL POINTS - ANTI-THEFT PROTECTION (PASSWORD) - VANDALISM WINDOW COVER MOUNT	■
AIR COMPRESSOR	■

877-745-7814
na.DoosanEquipment.com/dx225lc-7

Hyundai Doosan Infracore is an affiliate of Hyundai Heavy Industries Group.
The Doosan trademark, **DOOSAN**, is used under license from Doosan Corporation.
©2022 Hyundai Doosan Infracore. All rights reserved.

DOOSAN®