

DEVELON

Crawler Excavator

DX490LC-7



Engine

Make	Scania
Model	DC13
Number of cylinders	6
Rated power, gross (hp per SAE J1995)	394 hp (294 kW) @ 1800 rpm
Rated power, net (hp per SAE J1349)	394 hp (294 kW) @ 1800 rpm
Max. torque, gross (SAE J1995)	1374 ft.-lb. (1863 Nm) @ 1500 rpm
Piston displacement	775 in. ³ (12.7 L)
Bore and stroke	5.1 in. x 6.3 in. (130 mm x 160 mm)
Starter	24 V, 8.0 hp (6.0 kW)
Battery	2 x 12 V, 200 AH, 1300 CCA
Alternator	28 V, 100 amp
Air cleaner	Three-stage

Hydraulics

Main pumps	2 x 103 gpm (2 x 390 L/min.)
Pilot pump (gear design)	6.3 gpm (24 L/min.)
Relief pressure (normal mode)	4694 psi (330 kg/cm ²)
Relief pressure (power boost)	5400 psi (380 kg/cm ²)

Working Pressure

Boom/arm/bucket (normal mode)	4694 psi (330 kg/cm ²)
Boom/arm/bucket (power boost)	4980 psi (350 kg/cm ²)
Travel	4694 psi (330 kg/cm ²)
Swing	4267 psi (300 kg/cm ²)

Undercarriage

Upper rollers (each track)	3
Lower rollers (each track)	9
Number of shoes (links per side)	53
Total length of track	17' 10" (5455 mm)

Swing Mechanism

Swing speed	0 – 9.2 rpm
Swing torque	145600 lbf.-ft. (20130 kgf-m)

Drive System

Travel speed [low – high]	1.9 – 3.4 mph (3.1 – 5.5 km/h)
Traction force, max. (drawbar pull)	10751 lbf.-ft. (45700 kgf-m)
Max. grade (limited by engine lub)	70% (35°)

Environment

Sound level (2000/14/EC)	106 dB(A)
Cabin sound level (ISO 6396)	72 dB(A)

Refill Capacities

Fuel tank	162.7 gal. (616 L)
DEF tank	16.6 gal. (63 L)
Cooling system (radiator capacity)	13.9 gal. (53.5 L)
Engine oil (with filler)	11.9 gal. (45 L)
Swing drive	2 x 1.3 gal. (2 x 5 L)
Final drive (each side)	2.4 gal. (9 L)
Hydraulic system	145.3 gal. (550 L)
Hydraulic tank	70.0 gal. (265 L)

Hydraulic Cylinders

Boom ¹ (2) bore x rod diameter x stroke	Mono boom	6.7 in. x 4.5 in. x 65.0 in. (170 mm x 115 mm x 1650 mm)
	2-PC boom (lower)	–
	2-PC boom (upper)	–
Arm ^{1,2} (1) bore x rod diameter x stroke		7.5 in. x 5.1 in. x 78.0 in. (190 mm x 130 mm x 1980 mm)
Bucket ¹ (1) bore x rod diameter x stroke	STD	6.7 in. x 4.5 in. x 52.8 in. (170 mm x 115 mm x 1341 mm)
	SLR	–

¹ Cushion on rod end

² Cushion on base end


The piston rods and cylinder bodies are made of high-strength steel. A shock-absorbing mechanism is fitted in all cylinders to ensure shock-free operation and extended piston life.

NOTE: Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. All dimensions are given for DEVELON excavators equipped with standard tracks and the standard front as listed. Pictures of DEVELON excavators may show other than standard equipment. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. DEVELON equipment is manufactured with a Quality Management System that is in compliance with ISO 9001:2008.

Dimensions

		Standard Arm 35.4" (900 mm) TG Shoe (US20)		Standard Arm 35.4" (900 mm) TG Shoe (US25)	Long Arm 35.4" (900 mm) TG Shoe (US30)	
Boom length		23' 4" (7100 mm)				
Arm length		11' 0" (3350 mm)			13' 1" (3980 mm)	
Bucket type (SAE)		2.80 yd³ (2.14 m³)			2.35 yd³ (1.80 m³)	
Track type		Retractable		Fixed	Retractable	
Tail swing radius	A ₁	12' 6" (3800 mm)				
Tail swing overhang (rear)	A ₂	3' 6" (1073 mm)		3' 4" (1028 mm)	3' 6" (1073 mm)	
Tail swing overhang (side)	A ₃	5' 7" (1700 mm)		6' 4" (1935 mm)	5' 7" (1700 mm)	
Shipping height (boom)	B	11' 9" (3580 mm)		11' 10" (3610 mm)	12' 6" (3800 mm)	
Shipping height (hose)	C	12' 2" (3705 mm)			12' 10" (3910 mm)	
Shipping length	D	40' 1" (12230 mm)		40' 3" (12280 mm)	40' 5" (12310 mm)	
Shipping width	E	10' 10" (3290 mm)		12' 0" (3650 mm)	10' 10" (3290 mm)	
Counterweight clearance*	F	4' 8" (1430 mm)		4' 2" (1280 mm)	4' 8" (1430 mm)	
Cabin height	G	11' 0" (3350 mm)		10' 6" (3200 mm)	11' 0" (3350 mm)	
Upper structure width	without catwalks	H	9' 10" (2900 mm)			
	with catwalks		10' 10" (3296 mm)			
Cabin height above house		I	2' 9" (845 mm)			
Cabin width		J	3' 4" (1010 mm)			
Tumbler distance		K	14' 8" (4475 mm)			
Overall track length		L	17' 11" (5455 mm)			
Undercarriage width	retracted	M	12' 5" (3790 mm)	–	12' 5" (3790 mm)	
	extended		13' 9" (4200 mm)	12' 0" (3650 mm)	13' 9" (4200 mm)	
Track gauge		N	10' 10" (3300 mm)		9' 0" (2750 mm)	10' 10" (3300 mm)
Track shoe width		O	35.4" (900 mm)			
Track height*		P	3' 10" (1180 mm)		3' 6" (1070 mm)	3' 10" (1180 mm)
Car body clearance*		Q	2' 5" (730 mm)		1' 9" (530 mm)	2' 5" (730 mm)


*Without grouser height (36 mm)

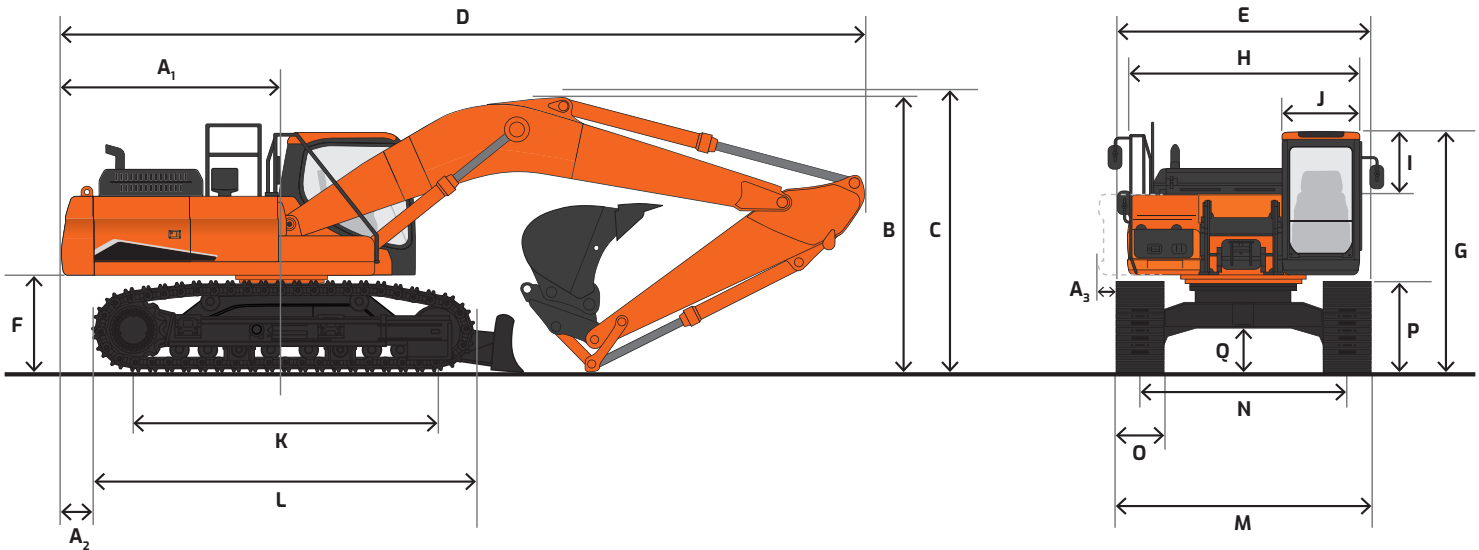

Working Range

		Standard Arm 35.4" (900 mm) TG Shoe (US20)		Standard Arm 35.4" (900 mm) TG Shoe (US25)	Long Arm 35.4" (900 mm) TG Shoe (US30)
Boom length		23' 4" (7100 mm)			
Arm length		11' 0" (3350 mm)			13' 1" (3980 mm)
Bucket type (SAE, PCSA)		2.80 yd³ (2.14 m³)			2.35 yd³ (1.80 m³)
Track type		Retractable	Fixed	Retractable	
Max. digging reach	A	39' 9" (12125 mm)			41' 7" (12670 mm)
Max. digging reach (ground)	B	38' 11" (11865 mm)	39' 0" (11895 mm)	40' 9" (12425 mm)	
Max. digging depth	C	25' 7" (7790 mm)	26' 1" (7940 mm)	27' 7" (8405 mm)	
Max. loading height	D	25' 10" (7865 mm)	25' 4" (7715 mm)	26' 4" (8025 mm)	
Min. loading height	E	10' 3" (3310 mm)	9' 9" (2980 mm)	8' 3" (2510 mm)	
Max. digging height	F	36' 3" (11050 mm)	35' 9" (10900 mm)	36' 9" (11205 mm)	
Max. bucket pin height	G	31' 9" (9690 mm)	31' 4" (9540 mm)	32' 4" (9850 mm)	
Max. vertical wall depth	H	14' 4" (4370 mm)	14' 10" (4520 mm)	16' 2" (4930 mm)	
Max. radius vertical	I	32' 9" (9970 mm)			33' 7" (10235 mm)
Max. depth to 8' line	J	25' 1" (7635 mm)	25' 6" (7785 mm)	27' 1" (8265 mm)	
Min. radius to 8' line	K	12' 9" (3895 mm)			12' 10" (3905 mm)
Min. digging reach	L	2' 9" (840 mm)	3' 6" (1055 mm)	2' 0" (50 mm)	
Min. swing radius	M	17' 1" (5210 mm)			17' 0" (5185 mm)
Bucket angle (DEG)	d	189.1°			180.9°
Digging force, bucket (PCSA)*	ISO	65920 lbf. (29900 kgf)			67900 lbf. (30800 kgf)
Digging force, arm*		50485 lbf. (22900 kgf)			45195 lbf. (20500 kgf)
Operating weight		121678 lb. (55192 kg)	117048 lb. (53092 kg)	121237 lb. (54992 kg)	
Ground pressure		9.0 psi (0.64 kg/cm²)	8.7 psi (0.61 kg/cm²)	9.0 psi (0.64 kg/cm²)	

*With power boost ON

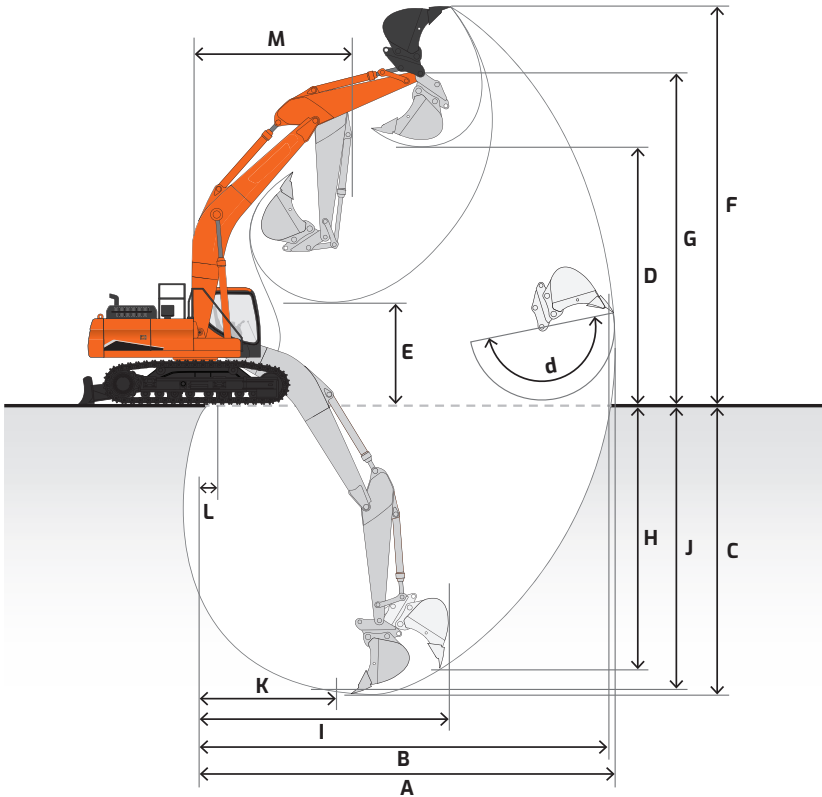

Lifting Capacity

 Rating over front  Rating over side or 360°

DX490LC-7 US20


Boom: 23' 4" (7100 mm) | Arm: 11' 0" (3350 mm) | Removable counterweight: 24420 lb. (11100 kg) | 35.4" (900 mm) TG Shoes | Bucket: None | Unit: lb. (kg)

A B (ft. or m)	10' (3.0 m)		15' (4.5 m)		20' (6.0 m)		25' (7.5 m)		30' (9.0 m)		Max. Reach		A
													
30' (9.0 m)							* 24150 (* 10620)	* 24150 (* 10620)			* 18740 (* 8370)	* 18740 (* 8370)	25.97' (7.81 m)
25' (7.5 m)							* 24160 (* 10920)	* 24160 (* 10920)			* 17780 (* 8090)	* 17780 (* 8090)	29.4' (8.87 m)
20' (6.0 m)							* 25790 (* 11600)	* 25790 (* 11600)	* 24000 (* 10850)	21670 (8810)	* 17520 (* 7950)	* 17520 (* 7950)	31.7' (9.61 m)
15' (4.5 m)			* 45500 (* 20120)	* 45500 (* 20120)	* 33940 (* 15160)	* 33940 (* 15160)	* 28310 (* 12720)	27910 (11370)	* 25150 (* 11350)	21170 (8600)	* 17770 (* 8040)	17610 (7160)	33.12' (10.06 m)
10' (3.0 m)			* 47520 (* 23290)	* 47520 (* 23290)	* 38940 (* 17450)	* 36820 (* 14900)	* 31060 (* 13970)	26800 (10870)	* 26600 (* 12000)	20570 (8330)	* 18500 (* 8340)	16810 (6790)	33.74' (10.28 m)
5' (1.5 m)			* 37470 (* 16870)	* 37470 (* 16870)	* 42580 (* 19190)	* 35250 (* 14180)	* 33330 (* 15030)	25850 (10440)	* 27840 (* 12580)	20030 (8090)	* 19780 (* 8900)	16630 (6680)	33.63' (10.26 m)
Ground Level			* 47080 (* 20730)	* 47080 (* 20730)	* 44130 (* 19990)	* 34390 (* 13770)	* 34560 (* 15650)	25230 (10150)	* 28420 (* 12890)	19660 (7910)	* 21860 (* 9800)	17060 (6830)	32.78' (10.03 m)
-5' (-1.5 m)	* 37920 (* 16320)	* 37920 (* 16320)	* 57320 (* 26160)	* 57320 (* 26160)	* 43540 (* 19820)	34120 (13620)	* 34340 (* 15620)	24970 (10010)	* 27740 (* 12650)	19550 (7850)	* 25240 (* 11250)	18290 (7280)	31.12' (9.55 m)
-10' (-3.0 m)	* 58130 (* 25370)	* 58130 (* 25370)	* 52410 (* 24050)	* 52410 (* 24050)	* 40690 (* 18640)	34320 (* 13690)	* 32090 (* 14720)	25110 (10060)			* 25940 (* 11760)	20760 (8210)	28.5' (8.79 m)
-15' (-4.5 m)	* 56450 (* 26290)	* 56450 (* 26290)	* 44170 (* 20510)	* 44170 (* 20510)	* 34590 (* 16070)	* 34590 (* 16070)	* 25590 (* 12090)	* 25590 (* 12090)			* 25460 (* 11600)	* 25460 (* 11600)	24.64' (7.65 m)
-20' (-6.0 m)			* 31420 (* 14280)	* 31420 (* 14280)							* 22790 (* 10360)	* 22790 (* 10360)	19.49' (5.94 m)

A Distance from center of rotation

B Height

NOTE: Lifting capacities are in compliance with SAE 1097 and ISO 10567. Machine in lifting mode with power boost turned on. Load point is the end of the arm. Rated loads shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities. Rated loads marked with an asterisk (*) are limited by hydraulic capacities. The least stable position is over the side. The total mass of machine includes the mass of the boom, arm, counterweight, all operating fluids and 165 lb. (75 kg) operator.

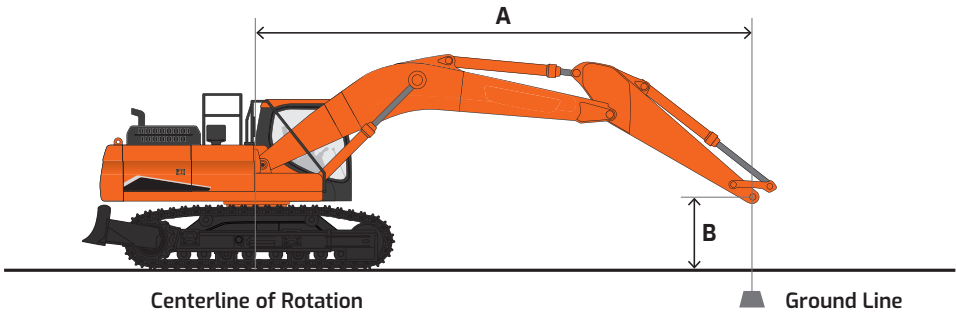

Lifting Capacity

 Rating over front  Rating over side or 360°


DX490LC-7 US25

Boom: 23' 4" (7100 mm) | Arm: 11' 0" (3350 mm) | Removable counterweight: 24420 lb. (11100 kg) | 35.4" (900 mm) TG Shoes | Bucket: None | Unit: lb. (kg)

A B (ft. or m)	10' (3.0 m)		15' (4.5 m)		20' (6.0 m)		25' (7.5 m)		30' (9.0 m)		Max. Reach		A
													
30' (9.0 m)							* 23420 (* 10790)	* 23420 (* 10790)			* 18450 (* 8730)	* 18450 (* 8730)	25.62' (7.79 m)
25' (7.5 m)							* 24060 (* 11100)	* 24060 (* 11100)			* 17840 (* 8250)	* 17840 (* 8250)	29.11' (8.87 m)
20' (6.0 m)							* 25580 (* 11790)	* 25580 (* 11790)	* 23920 (* 11040)	19430 (8460)	* 17520 (* 8110)	17340 (7560)	31.52' (9.61 m)
15' (4.5 m)			* 44360 (* 20330)	* 44360 (* 20330)	* 33410 (* 15350)	* 33410 (* 15350)	* 28040 (* 12910)	25060 (10890)	* 25010 (* 11530)	18960 (8250)	* 17720 (* 8200)	15790 (6880)	33.01' (10.06 m)
10' (3.0 m)			* 51350 (* 23120)	49200 (21220)	* 38470 (* 17660)	32860 (14220)	* 30790 (* 14160)	23970 (10400)	* 26450 (* 12190)	18370 (7990)	* 18400 (* 8500)	14980 (6530)	33.71' (10.28 m)
5' (1.5 m)			* 37190 (* 16710)	* 37190 (* 16710)	* 42310 (* 19400)	31260 (13510)	* 33140 (* 15230)	23010 (9980)	* 27740 (* 12770)	17830 (7750)	* 19620 (* 9060)	14730 (6420)	33.68' (10.26 m)
Ground Level			* 45690 (* 20570)	* 45690 (* 20570)	* 44070 (* 20200)	30350 (13110)	* 34490 (* 15840)	22370 (9690)	* 28410 (* 12660)	17440 (7580)	* 21610 (* 9960)	15050 (6550)	32.9' (10.3 m)
-5' (-1.5 m)	* 35990 (* 16170)	* 35990 (* 16170)	* 57680 (* 26390)	46110 (19850)	* 43700 (* 20030)	30040 (12970)	* 34440 (* 15820)	22080 (9560)	* 27900 (* 12590)	17310 (7520)	* 24810 (* 11410)	16050 (6980)	31.33' (9.55 m)
-10' (-3.0 m)	* 55930 (* 25210)	* 55930 (* 25210)	* 53030 (* 24270)	* 46600 (* 20060)	* 41100 (* 18850)	30190 (13040)	* 32440 (* 14910)	22170 (9600)			* 25930 (* 11950)	18090 (7870)	28.83' (8.78 m)
-15' (-4.5 m)	* 57970 (* 26520)	* 57970 (* 26520)	* 45210 (* 20720)	* 45210 (* 20720)	* 35420 (* 16270)	30830 (13320)	* 26660 (* 12280)	22810 (9890)			* 25580 (* 11790)	22270 (9660)	25.1' (7.65 m)
-20' (-6.0 m)			* 31490 (* 14480)	* 31490 (* 14480)							* 22840 (* 10550)	* 22840 (* 10550)	19.48' (5.94 m)

A Distance from center of rotation
B Height

NOTE: Lifting capacities are in compliance with SAE 1097 and ISO 10567. Machine in lifting mode with power boost turned on. Load point is the end of the arm. Rated loads shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities. Rated loads marked with an asterisk (*) are limited by hydraulic capacities. The least stable position is over the side. The total mass of machine includes the mass of the boom, arm, counterweight, all operating fluids and 165 lb. (75 kg) operator.

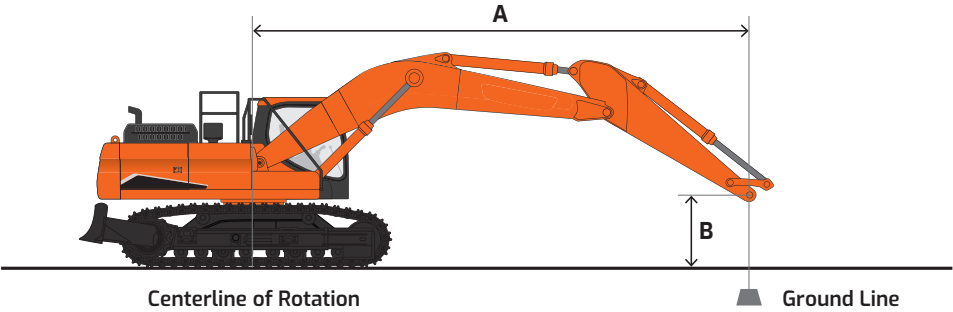

Lifting Capacity

 Rating over front  Rating over side or 360°


DX490LC-7 US30

Boom: 23' 4" (7100 mm) | Arm: 13' 1" (3980 mm) | Removable counterweight: 24420 lb. (11100 kg) | 35.4" (900 mm) TG Shoes | Bucket: None | Unit: lb. (kg)

A B (ft. or m)	5' (1.5 m)	10' (3.0 m)	15' (4.5 m)	20' (6.0 m)	25' (7.5 m)	30' (9.0 m)	35' (10.5 m)	Max. Reach								
A B (ft. or m)	Rating over front Rating over side or 360°	Rating over front Rating over side or 360°	Rating over front Rating over side or 360°	Rating over front Rating over side or 360°	Rating over front Rating over side or 360°	Rating over front Rating over side or 360°	Rating over front Rating over side or 360°	Rating over front Rating over side or 360°	Rating over front Rating over side or 360°	A						
30' (9.0 m)								* 16030 (* 7270)	* 16030 (* 7270)	25.62' (7.79 m)						
25' (7.5 m)						* 22080 (* 10020)	* 22080 (* 10020)	* 15360 (* 6970)	* 15360 (* 6970)	29.11' (8.87 m)						
20' (6.0 m)					* 24270 (11010)	* 24270 (11010)	* 22760 (* 10330)	* 22760 (* 10330)	* 15190 (* 6890)	* 15190 (* 6890)	31.52' (9.61 m)					
15' (4.5 m)				* 31760 (* 14410)	* 31760 (* 14410)	* 26980 (* 12240)	* 26980 (* 12240)	* 24180 (* 10970)	* 24180 (* 10970)	* 18410 (* 8350)	* 18410 (* 8350)	* 15430 (* 7000)	* 15430 (* 7000)	33.01' (10.06 m)		
10' (3.0 m)			* 51770 (* 23480)	* 51770 (* 23480)	* 37140 (* 16840)	* 37140 (* 16840)	* 29990 (* 13600)	* 29990 (* 13600)	* 25870 (* 11740)	24860 (11280)	* 22760 (* 10320)	19770 (8970)	* 16040 (* 7270)	* 16040 (* 7270)	33.71' (10.28 m)	
5' (1.5 m)			* 48970 (* 22210)	* 48970 (* 22210)	* 41500 (* 18820)	* 41500 (* 18820)	* 32650 (* 14810)	31330 (14210)	* 27430 (* 12440)	24220 (10990)	* 23990 (* 10880)	19440 (8820)	* 17090 (* 7750)	* 17090 (* 7750)	33.68' (10.26 m)	
Ground Level			* 50780 (* 23040)	* 50780 (* 23040)	* 43940 (* 19930)	41910 (19010)	* 34400 (* 15600)	30550 (13860)	* 28440 (* 12900)	23740 (10770)	* 20430 (* 9270)	19220 (8720)	* 18750 (* 8510)	* 18750 (* 8510)	32.9' (10.3 m)	
-5' (-1.5 m)	* 28960 (* 13140)	* 28960 (* 13140)	* 36980 (* 16770)	* 36980 (* 16770)	* 59400 (* 26950)	* 59400 (* 26950)	* 44280 (* 20090)	41390 (18770)	* 34840 (* 15800)	30130 (13670)	* 28460 (* 12910)	23500 (10660)		* 21380 (* 9700)	20250 (9190)	31.33' (9.55 m)
-10' (-3.0 m)	* 42010 (* 19060)	* 42010 (* 19060)	* 52520 (* 23820)	* 52520 (* 23820)	* 55670 (* 25250)	* 55670 (* 25250)	* 42460 (* 19260)	41390 (18780)	* 33550 (* 15220)	30090 (13650)	* 26690 (* 12110)	23580 (10690)		* 25100 (* 11380)	22530 (10220)	28.83' (8.78 m)
-15' (-4.5 m)			* 65610 (* 29760)	* 65610 (* 29760)	* 48920 (* 22190)	* 48920 (* 22190)	* 37910 (* 17190)	* 37910 (* 17190)	* 29480 (* 13370)	* 29480 (* 13370)				* 25240 (* 11450)	* 25240 (* 11450)	25.1' (7.65 m)
-20' (-6.0 m)					* 37310 (* 16920)	* 37310 (* 16920)	* 28350 (* 12860)	* 28350 (* 12860)						* 24040 (* 10910)	* 24040 (* 10910)	19.48' (5.94 m)

A Distance from center of rotation
B Height

NOTE: Lifting capacities are in compliance with SAE 1097 and ISO 10567. Machine in lifting mode with power boost turned on. Load point is the end of the arm. Rated loads shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities. Rated loads marked with an asterisk (*) are limited by hydraulic capacities. The least stable position is over the side. The total mass of machine includes the mass of the boom, arm, counterweight, all operating fluids and 165 lb. (75 kg) operator.

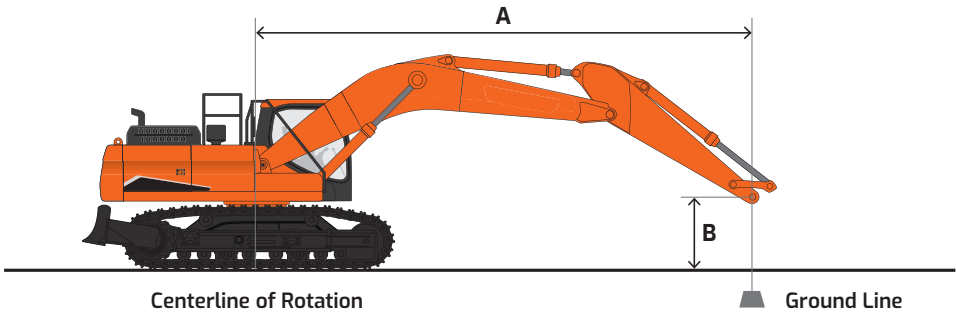

Standard & Optional Equipment

■ Standard ● Optional

Engine

Emissions (EPA)	T4f
High-pressure common-rail (HPCR)	■
Variable geometry (VGT)	■
Cooled exhaust gas recirculation (CEGR)	■
Selective catalyst reduction (SCR)	■
Diesel exhaust fluid (DEF)	■
Fuel filter with water separator	■
Coolant expansion tank	■
Dual element dry-type air filter with evacuator	■
Precleaner	■
Electronic engine control (ECU)	■
Auto idle	■
Auto shutdown (time-adjustable)	■
Overheat & low oil pressure engine protection	■
Block heater (110 V)	●
Fuel filler pump	●

Hydraulic

Electronic Power Optimizing System (EPOS)	■
Variable axial piston main pump (tandem)	■
Cross-sensing pump control	■
Pilot-operated control valves	■
Gear pilot pump	■
D-ECOPOWER	■
Smart Power Control (SPC)	■
Variable-speed hydraulic cooling fan	■
Axial piston swing motor	■
Spring-applied hydraulic release brake, swing motor	■
Axial piston travel motor (high/low, auto)	■
Auxiliary hydraulics, one- & two-way piping	■
Auxiliary hydraulics, tilt/rotate piping	●
Adjustable auxiliary flow & pressure, 10 presets	■
Intelligent floating boom	●
Breaker filter	●
Boom & arm lock valves	●
Straight travel	●

Controls

Joystick controls	■
Pattern control change valve (SAE, ISO)	■
Joystick attachment control	■
Switches/buttons	
- Right (one-way, two-way, power boost)	
- Left (tilt/rotate, horn, one-touch decel)	
Foot pedal attachment control	■
Control stands	■
- Height adjustable	
- Sliding (fore/aft)	
- Tilting armrests	
Engine speed control dial	■
Travel pedals with hand levers	■
Straight travel pedal	●
Switches, console-mounted	■
- Starter button switch	
- Travel speed selector	
- Work light	
- Auxiliary mode switch	
Emergency stop switch	■
Power modes (P+, P, S, E)	■
Work modes (digging, lifting, breaker, shear)	■
Smart Power Control (SPC)	■
Jog dial display control	■
Bluetooth® control panel	■
Wiper control panel	■
Audio control panel	■

Cabin

Steel, all-weather & sound-suppressed	■
ROPS (ISO 12117-2:2008)	■
Viscous mount with spring reinforcement	■
Front window with wiper/washer	■
Tinted safety glass	■
Skylight top hatch with sun screen	■
Front window with sun screen	■
Pull-up type top front window	■
Removable lower front window with storage behind seat	■
Adjustable sliding side door window	■
Defrost, front window	■
Lockable doors	■
Seat	■
- Heated	
- Air suspension	
- 2" (51 mm) seat belt	
- Adjustable height & recline	
- Adjustable fore/aft	
- Adjustable armrests	
Leatherette seat	●
- Heating & cooling	
- Air suspension	
- 2" (51 mm) seat belt	
- Adjustable height & recline	
- Adjustable fore/aft	
- Adjustable armrests	
3" (76 mm) seat belt	●
Control stands	■
- Height adjustable	
- Mounted to seat base	
Storage for operator's manuals	■
Mirrors	■
Fully automatic HVAC with ambient temperature sensor	■
8" multi-function LCD interactive display monitor	■
Cigarette lighter	■
Digital Bluetooth audio broadcasting MP3 radio with cell phone integration	■
Speakers (2)	■
Antenna, roof-mounted	■
Emergency breakout tool	■
Hot/cold beverage compartment	■
Power socket, 12 V & 24 V	■
Cup holder	■
Interior light	■
Coat hanger	■
Rain shield	●
Fog guard	●
Panto wiper, front windshield & lower window	■
Front window guard	●
Vandalism window cover mount	■

Electrical

System voltage – 24 V	■
Alternator – 28 V, 100 amp	■
2 x 12 V batteries, 200 AH reserve capacity	■
Blade-type fuse panel	■
Main circuit breaker	■
Light, work (LED): machine (2), boom (2)	■
Light, work (LED): 6 cab top, front (4), rear (2)	●
Light, work (LED): 4 cab top, front (2), rear (2)	●
Rotating beacon	●
Hour meter	■
Engine restart prevention system	■
Side view & rearview camera with LED lamps (6)	■
360° all-around view camera	■
Ultrasonic sensor	■
Laptop service port	■
Self-diagnostics system	■
Smart key (remote ignition key)	■
DEVELON Fleet Management	■

Display Monitor & Warnings

Indicators	■
- Work modes (P+, P, S, E)	
- User/Service menu	
Gauges	■
- Fuel level	
- DEF level	
- Engine coolant temperature	
- Hydraulic oil temperature	
- Engine rpm	
- Battery voltage	
- Hydraulic pump pressure	
- ECO	
- Digital clock	
- Trip meter	
- Hour meter	
- Fuel consumption	
Warning & indicator lights	
- Seat belt	
- Error code	
- SCR warning	
- Check engine	
- Engine oil pressure	
- Engine pre-heat engaged	
- Radiator coolant level & temperature	
- Air filter	
- Fuel level	
- DEF level – low	
- Water in fuel	
- Battery charge	
- Work lights on	
- Hydraulic oil temperature	
- Hydraulic charge pressure	
- Hydraulic pilot filter	
- Hydraulic return filter	
Swing alarm	■
Travel alarm	■
Buzzer	■
- Engine oil pressure	
- Coolant temperature	

Undercarriage

Fixed track width	●
Retractable undercarriage frames	■
Track guards & chains with adjusters	■
Track rollers, upper	3
Track rollers, lower	9
In-shoe motor protection	■
Shoes, double grouser – 600 mm	●
Shoes, triple grouser – 600 mm	●
Shoes, triple grouser – 750 mm	●
Shoes, triple grouser – 800 mm	●
Shoes, triple grouser – 900 mm	■

Frame

Counterweight, fixed	●
Counterweight, retractable	■
Catwalks	■

Other

Centralized lubrication	■
- Boom	
- Arm	
- Swing	
Handrails & service platforms	■
Skid-resistant steps & service platforms	■
Manuals	■
- Operation & Maintenance	
- Parts	
- AEM Safety Manual	
DEVELON Fleet Management 3-year subscription	■
Vandalism protection	■
- Lockable panels	
- Lockable fluid fill points	
- Anti-theft protection (password)	
- Vandalism window cover mount	
Air compressor	●

DEVELON

na.develon-ce.com/dx490lc-7

DX490LC-7 Crawler Excavator Spec Sheet
Printed in the U.S.A.
23906_001_D042723

©2023 HD Hyundai Infracore. All rights reserved.
DEVELON is a brand of HD Hyundai Infracore;
HD Hyundai Infracore is an affiliate of HD Hyundai.